


Trimble® CFX-750™ Display

Quick Reference Card

RUN SCREEN


The Trimble® CFX-750™ display is a touchscreen display that is configured and run by tapping the icons that appear on the display screen. The icons on the screen will vary depending on the applications you are running. The image below shows the areas where each main function can be found on the screen when running in the field.

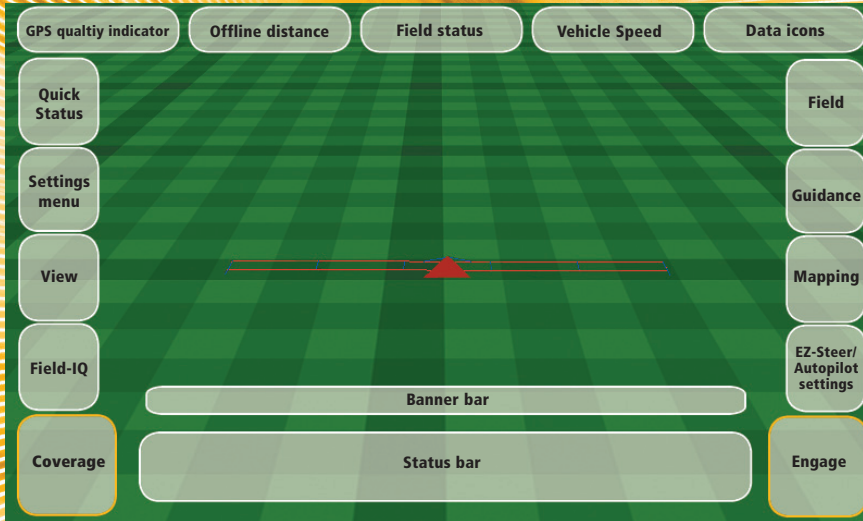



QUICK START WIZARD

By default, the Quick Start Wizard appears every time you turn on the CFX-750 display. It enables you to easily confirm or change important system settings before you begin working.

SETUP AND CONFIGURATION

















Features can be set up or configured manually from the Run screen by tapping the  button.

HELP






The CFX-750 display has built-in, context-sensitive Help that lets you quickly find information you need. To access Help from any configuration screen, tap . When you are finished with the Help screen, tap .

Note - For more information on how to use this product, refer to the **CFX-750 Display CD**.







System icons

Icon	Description
	System and display setup
	EZ-Steer setup
	GPS / GLONASS setup
	Data configuration
	Display in-built help
	Access configuration screens
	Next page
	Back page
	Cancel changes
	Accept / save changes
	Delete
	Status information
	Edit item
	Menu
	Configure
	Setup wizard

Mapping icons

Icon	Description
	Map line feature
	Map tree (point feature)
	Map rock (point feature)
	Mapping configuration
	Area feature





Application icons

Icon	Description
	Manual section control
	Automatic section control
	Target rate
	Section control off
	Coverage logging on
	Coverage logging off


















View icons

Icon	Description
	Activate external video input
	Full screen external video
	Pan view
	Run screen trailing view
	Run screen overhead view
	Zoom in
	Zoom out

Information icons

Icon	Description
	Setup complete
	Critical warning
	General alert
	Information


Guidance icons

Icon	Description
	Guidance pattern select
	Pause guidance
	Nudge left
	Nudge right
	Record FreeForm™ guidance pattern
	Set A point
	Set B point
	Start recording headland
	Pause recording headland
	End headland recording
	Cannot engage auto guidance
	Ready to engage auto guidance
	Auto guidance engaged
	Increase auto guidance aggressiveness
	Decrease auto guidance aggressiveness
	Shift AB line
	Next AB line

GUIDANCE PATTERNS


AB Line / A+ Line


Map a straight line for guidance.
For an AB line, set the A point at the start of the line and the B point at the end.
For an A+ line, specify the heading direction of the line (it defaults to the heading of the previous AB line).

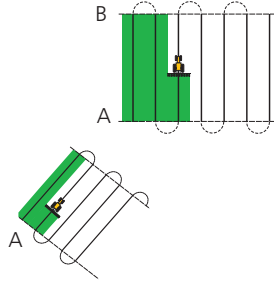

FreeForm

Creates curved and straight lines for guidance in fields of any shape by recording the exact path you have driven, to generate the next pass. Ensure that you keep recording your path, to continue receiving guidance.




You can record your path manually or let the system record it automatically (when coverage is enabled).
When more than one path is in the area, use the Next AB icon  to toggle between them.


Center-pivot

Set the A point, drive the pivot, and then set the B point.
For best results, follow the outermost wheeltrack of the pivot arm.
Note - To work from the center of the field outwards, the initial pivot must have a radius of at least two swath widths and an arc length of at least four swath widths.




Headland

Straight swaths automatically fill the headland boundary.
Enter the number of headland circuits you want before you start defining the field.
Start the headland, define the guidance line, and then return to the start circle or tap  to complete the headland.
Note - Additional headlands are based on the first headland circuit.

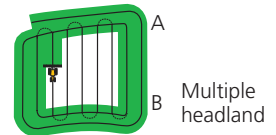

Identical curve

Guidance is based on the initial curve.
Any deviations are ignored.
Set the A point, drive the curve, and then set the B point.



Adaptive curve


Guidance is always based on the last pass.

Auto U-turn detection = On

Each new swath is automatically generated when you turn.




Auto U-turn detection = Off




Set the B point at the end of each pass to create the next swath.



GPS QUALITY SETTINGS







The CFX-750 display will always provide the most accurate position possible but you can select the minimum operational thresholds for guidance operation.

To set the level of GNSS performance allowable for operation, tap , tap  and then tap  until the *Position Quality* screen appears.

Bars	Option	Select
	Favor Accuracy	For operations that require the highest accuracy, such as row crop planting and strip-till applications. Note - Trimble recommends this option for the best pass-to-pass or strip-till applications.
	Balanced Quality	To trade potential accuracy for a slight increase in production time.
	Favor Availability	To expend production time further, with more potential for reduced accuracy. Note - This option sometimes trades some accuracy for more availability or runtime. This option may still achieve the highest level of accuracy that is applicable for your correction source. If you select this option when using RTK corrections, the system may use positions that are greater than 1" pass-to-pass accuracy.


STATUS INDICATORS

On the main guidance screen, there are two status indicators:

Icon	Satellite status	Icon	USB drive status
	Good signal		Connected and ready
	Signal outside acceptable settings		Loading
	No signal		USB disabled

Note: If a USB drive is not connected, the USB icon does not appear.

MAPPING


To activate mapping functions, tap the  button on the Run screen. The mapping tray contains icons that correspond to point, line, and area features that can be recorded and saved with the field. Area features can be used to map exclusion zones for section control.




To configure the mapping options for warning zone distance and recording position, tap , tap  and then tap . Set the mapping preferences for point, line, or area.

CREATING A FIELD


- 1 In the Run screen, tap **Field**.

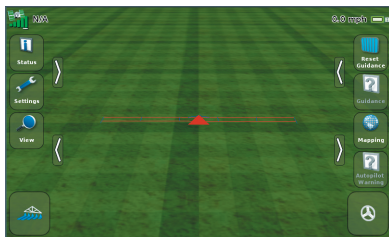


- 2 If you have finished with the current field, tap **Yes**.

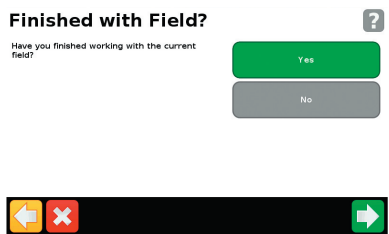


- 3 Select **Create New Field**.

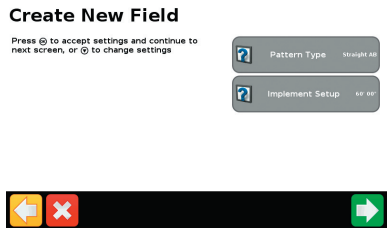


- 4 In the *Create New Field* screen, confirm or change the **Pattern Type** and **Implement Setup**.

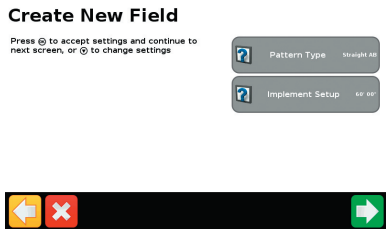


- 5 Decide if you want to record a boundary.

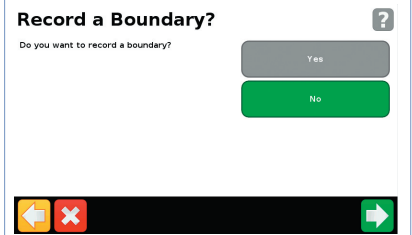


- 6 Confirm or change the name of the *Client*, *Farm*, *Field*, or *Event* to use.

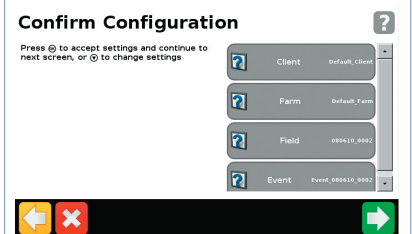

- 7 If required, enter *Record Keeping* information (for example, EPA number and wind speed).

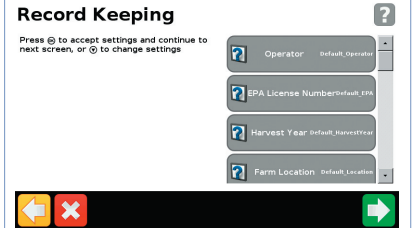

- 8 With the vehicle in position at the start of the swath, set the A point – at the end of the swath, set the B point.

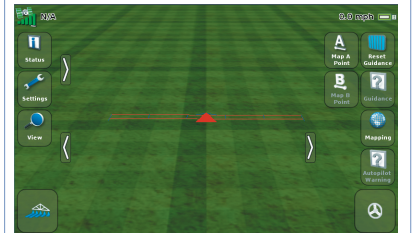

Note - Tap  to move to the next screen.

Trimble® CFX-750™ Display

Quick Reference Card

EXPORTING FIELD DATA

Records of the field data are automatically stored on the CFX-750 display. These records include application coverage, event information, and other field characteristics.


To export field data for viewing on an external computer:

- 1 Insert a USB drive into the USB port on the CFX-750 display.
- 2 Click *Settings / Data Management*.
- 3 In the *Data Management* screen, select *Transfer / Manage Data*.
- 4 Select *USB / Send Data / Send Fields to USB*.
- 5 Select the name of the Client, Farm, Field, and Event that you want to export to the USB drive. To select all field data, select *Client / All*.
- 6 Click to accept the confirmation message.

VIEWING FIELD DATA

The CFX-750 package contents may include an installation CD-ROM for Farm Works® View software. This software is complimentary and can be used to manage your field information, view coverage logging and field information, and to preset names of clients, farms, and fields that can be imported into the CFX-750 display. You can also download Farm Works View software at no charge from <http://www.farmworks.com/products/Office/View>.

CONNECTING THE SYSTEM

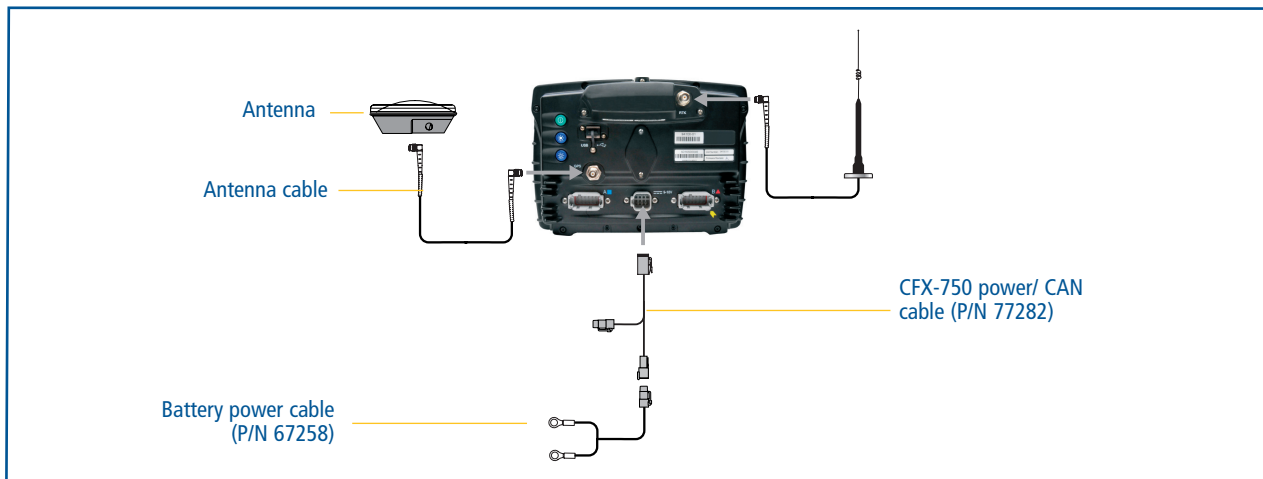

P/N 78838-00-ENG

© 2010. Trimble Navigation Limited. All rights reserved. Trimble, the Globe and Triangle logo, and Farm Works are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. CFX-750 is a trademark of Trimble Navigation Limited. Version 1.00, Rev A (August 2010).